


Specifications

Sealing Mechanism: Welded Bellows
Material Exposed to Vacuum: SST, Torlon
Bakeout Temperature: 200°C (Maximum)

Operating Temperature: -20° to 100°C
Pressure Range: Atmosphere to 1×10^{-11} Torr
Position Lock: Radial: Lock Screw Linear: Hand Knob
Maximum Axial Load: 20 lbs. (9.1 kg) concentric load
Rotary Resolution (Vernier): 1°


THIS DRAWING IS THE PROPERTY OF HUNTINGTON MECHANICAL LABS, INC., AND IS PROPRIETARY IN GENERAL AND IN DETAIL. IT SHALL NOT BE MODIFIED IN ANY WAY. PERMISSION IS GIVEN TO PRINT AND DISSEMINATE FREELY.

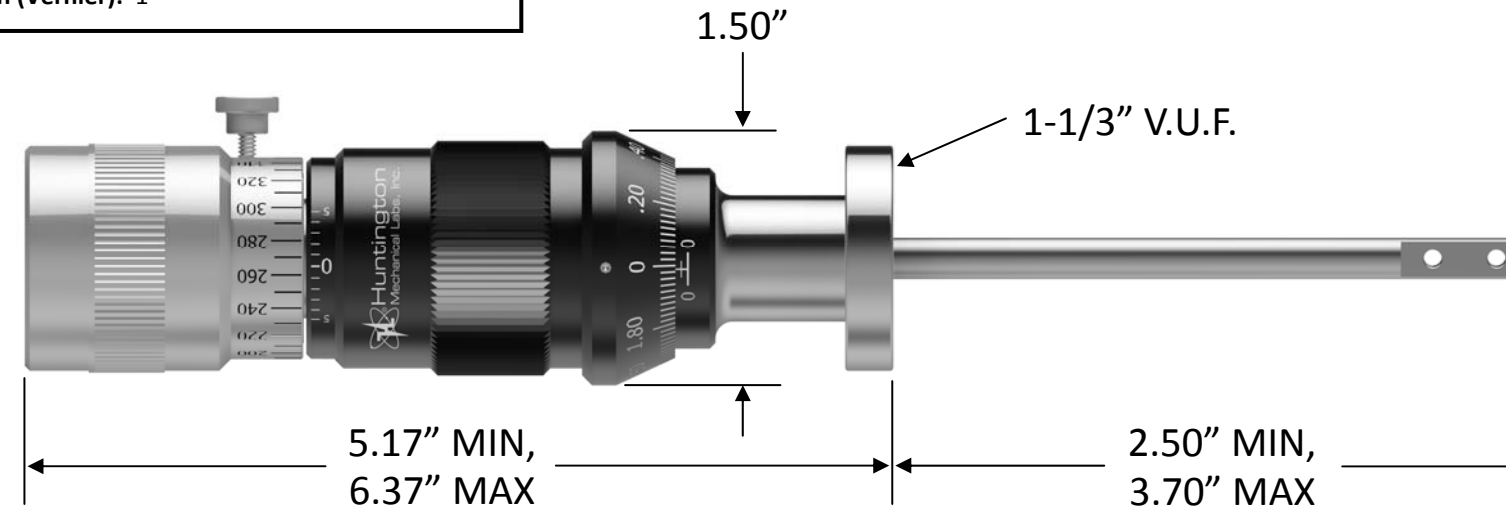


VF-187-X-A Series



VF-187-X-SF Series

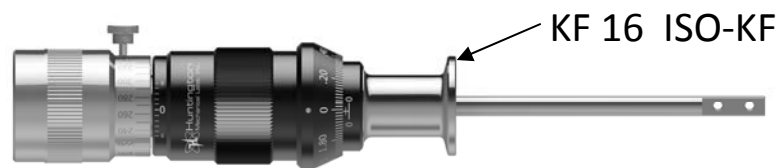

SHAFT TIP DETAIL

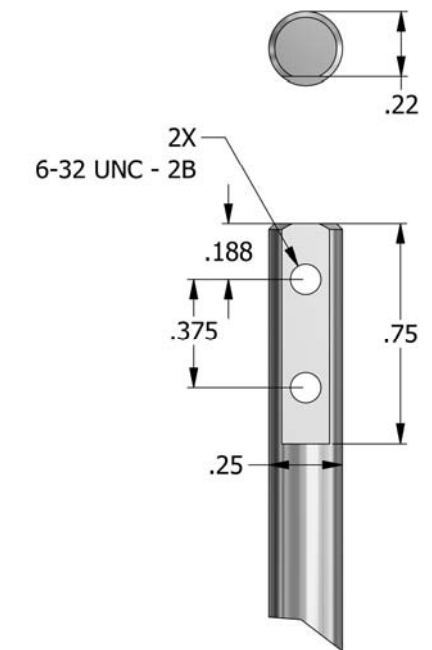

Dimensions: inches (mm)

MANUAL ROTARY / LINEAR FEEDTHROUGH

FLANGE	LINEAR TRAVEL	WEIGHT (lbs.)	PART NUMBER
1 1/3"	1.20 (30.0)	1.2	VF-187
2 3/4"	1.20 (30.0)	1.7	VF-187-A
KF 16	1.20 (30.0)	1.2	VF-187-SF

Other stroke lengths & flange options available. For quotes, please call 800-227-8059 or visit our website at www.huntvac.com. Email: vacman@huntvac.com

		13355 NEVADA CITY AVENUE GRASS VALLEY, CA. 95945
FEEDTHRU, ROTARY-LINEAR .25" SHAFT, US STD. 1.20" TRAVEL		
B	DWG. NO. VF-187-(A)-(SF) OUTLINE	REV. -
SCALE: NO SCALE	SHEET: 1	OF 1