


Specifications

Sealing Mechanism: Welded Bellows
 Material Exposed to Vacuum: Stainless Steel
 Bakeout Temperature: 200°C,
 Operating Temperature: -20° to 150°C,

Pressure Range: Atmosphere to 1×10^{-11} Torr
 Position Lock: Thumb Screw
 Maximum Torque: 125 oz./in.
 Scale Resolution: 5°

THIS DRAWING IS THE PROPERTY OF HUNTINGTON MECHANICAL LABS, INC., AND IS PROPRIETARY IN GENERAL AND IN DETAIL. IT SHALL NOT BE MODIFIED IN ANY WAY. PERMISSION IS GIVEN TO PRINT AND DISSEMINATE FREELY.

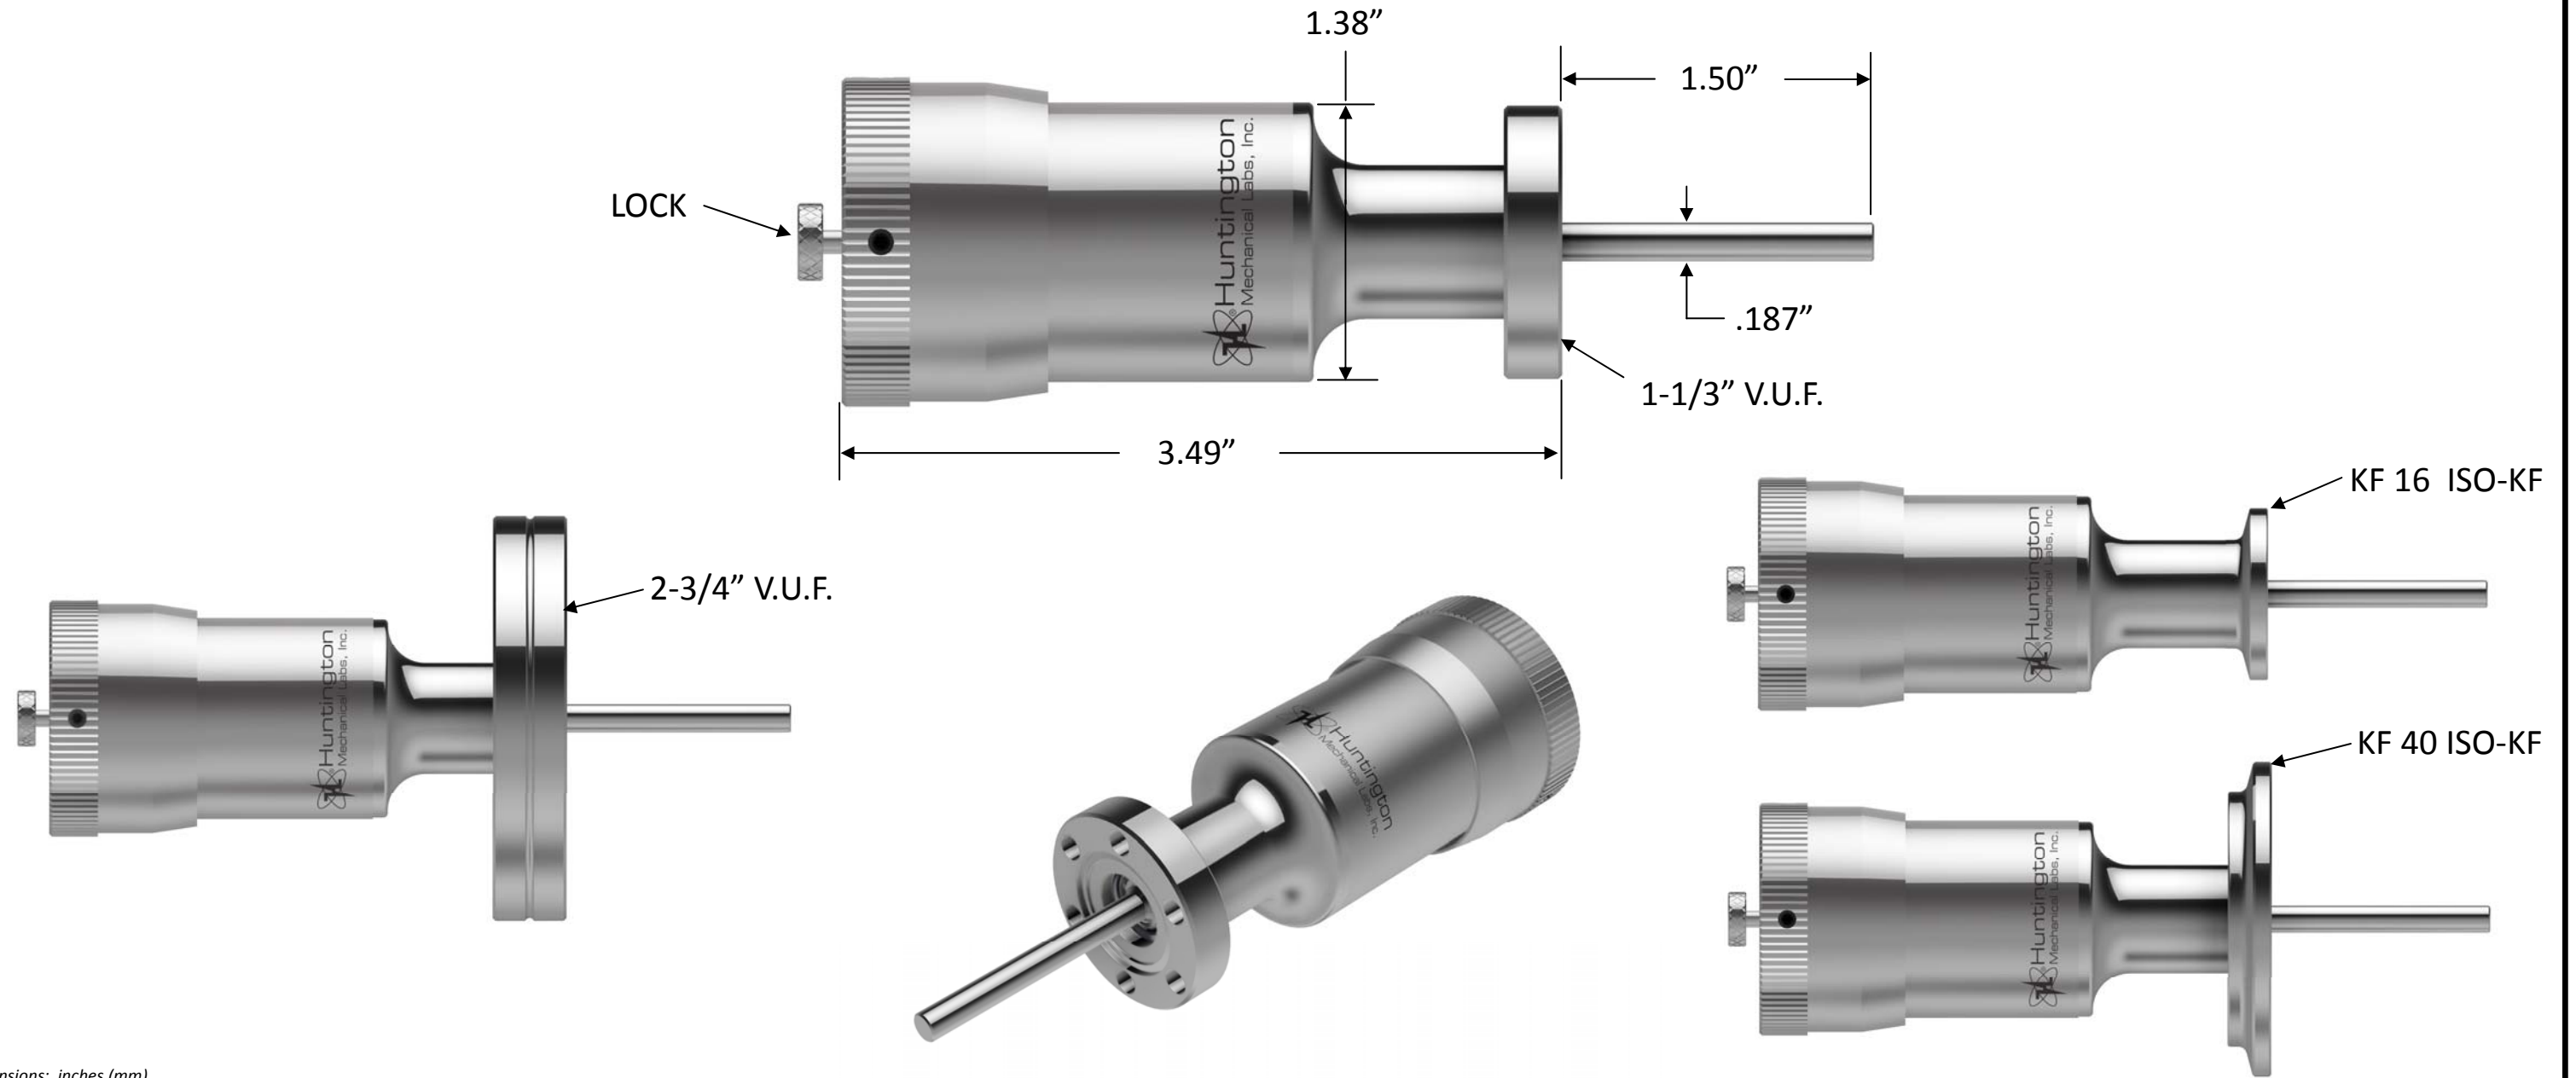

Dimensions: inches (mm)

VALUE LINE MINI ROTARY MOTION FEEDTHROUGH

FLANGE	DESCRIPTION	WEIGHT (lbs.)	PART NUMBER
VAC-U-FLANGE® Series			
1 1/3"	Rotary Feedthrough, Aluminum w/o dial	0.6	VF-016
2 3/4"	Rotary Feedthrough, Aluminum w/o dial	1.1	VF-016-A
SPEED FLANGE SYSTEM (ISO-KF)			
KF 16	Rotary Feedthrough, Aluminum w/o dial	0.6	VF-016-SF
KF 40	Rotary Feedthrough, Aluminum w/o dial	1.0	VF-016-SF-150

Other stroke lengths & flange options available. For quotes, please call 800-227-8059 or visit our website at www.huntvac.com. Email: vacman@huntvac.com

		13355 NEVADA CITY AVENUE GRASS VALLEY, CA. 95945
MINI ROTARY MOTION FEEDTHROUGH, VALUE		
B	DWG. NO. VF-016-X-XX OUTLINE	REV. -
SCALE: NO SCALE	SHEET: 1	OF 1